

BERESKIN & PARR  
Box 401  
40 King Street West  
Toronto, Ontario, Canada  
M5H 3Y2



Telephone: (416) 364-7311  
Telex: 06-23115  
Cable ARNBEE Toronto  
Telecopies: (416) 364-1398

April 15, 1998

The Commissioner of Patents & Trademarks  
Washington, D.C. U.S.A. 20231

Our File No.: 680-148

Dear Sirs:

Transmitted herewith for filing is the patent application of

Inventors: **ROBERT BRENNAN**

For: **METHOD AND APPARATUS FOR NOISE REDUCTION, PARTICULARLY IN HEARING AIDS**

The following papers are also enclosed:

3 sheets of        Formal Drawings X Informal Drawings

An assignment of the invention to        together with a cover sheet and cheque in the amount of \$40.00 for the assignment recordal fee.

       Small entity declaration(s). Please accord this application "small entity" status.

CLAIMS AS FILED						
	Number Filed		Number Extra	Full Rate	Small Entity Rate	TOTAL
Total Claims	26	-	20 = 6 X	\$ 22.00	\$ 11.00 =	\$66.00
Independent Claims	4	-	3 = 1 X	\$ 82.00	\$ 41.00 =	\$41.00
Multiple Dependency	X		Flat Rate	\$270.00	\$135.00 =	\$135.00
				Base Fee (\$790/395)	-	\$395.00
TOTAL FEES						= <u>\$637.00</u>

       The government fee of \$637.00 is included in our cheque no.       . This letter is enclosed in duplicate.

       The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to our Deposit Account No. 02-2095.

       Related application. This application is a        Division        Continuation        Continuation-in-part of application Serial No.       , filed       .

X Convention priority is requested based on application Serial No. 60/041,991, filed April 16, 1997.  
A certified copy of this application        is enclosed        will follow.

Respectfully submitted,

H. Samuel Frost  
Registration No. 31,696

B&P File No. 680-148

**BERESKIN & PARR**

**UNITED STATES**

**Title: Method and Apparatus for Noise Reduction, Particularly in Hearing  
Aids  
Inventor: Robert Brennan**

**Title: Method and Apparatus for Noise Reduction, Particularly in Hearing Aids**

**CROSS-REFERENCE TO RELATED APPLICATION**

This application claims benefit from United States  
5 provisional application serial no. 60/041,991 filed on April 16, 1997.

**FIELD OF THE INVENTION**

This invention relates to noise reduction in audio or other signals and more particularly relates to noise reduction in digital hearing aids.

10 **BACKGROUND OF THE INVENTION**

Under noisy conditions, hearing impaired persons are severely disadvantaged compared to those with normal hearing. As a result of reduced cochlea processing, hearing impaired persons are typically much less able to distinguish between meaningful speech and competing sound  
15 sources (i.e., noise). The increased attention necessary for understanding of speech quickly leads to listener fatigue. Unfortunately, conventional hearing aids do little to aid this problem since both speech and noise are boosted by the same amount.

Compression algorithms used in some hearing aids boost  
20 low level signals to a greater extent than high level signals. This works well with low noise signals by raising low level speech cues to audibility. At high noise levels, compression performs only modestly since the action of the compressor is unduly influenced by the noise and merely boosts the noise floor. For persons that frequently work in high ambient sound  
25 environments, this can lead to unacceptable results.

**BRIEF SUMMARY OF THE INVENTION**

The present invention provides a two-fold approach to sound quality improvement under high noise situations and its practical

implementation in a hearing aid. The present invention removes noise from the input signal and controls the compression stage with a cleaner signal. The signal for amplification (the upper path) is, optionally, processed with a different noise reduction algorithm. Under certain  
5 circumstances, it may be desirable to use the same noise reduced signal for application and compression control in which case the two noise reduction blocks merge. In another instance, it may be desirable to alter or eliminate the noise reduction in the upper path.

Clearly, noise reduction is not suitable for all listening  
10 situations. Any situation where a desired signal could be confused with noise is problematic. Typically these situations involve non-speech signals such as music. A remote control or hearing aid control will usually be provided for enabling or disabling noise reduction.

The present invention is based on the realization that,  
15 what is required, is a technique for boosting speech or other desired sound source, while not boosting noise, or at least reducing the amount of boost given to noise.

In accordance with a first aspect of the present invention, there is provided a method of reducing noise in a signal, the method  
20 comprising the steps:

- (1) supplying the input signal to an amplification unit;
- (2) subjecting the input signal to an auxiliary noise reduction algorithm, to generate an auxiliary signal;
- (3) using the auxiliary signal to determine control inputs  
25 for the amplification unit; and
- (4) controlling the amplification unit with the control signals, to generate an output signal with reduced noise.

Preferably, the input signal is subjected to a main noise reduction algorithm, to generate a modified input signal, which is supplied  
30 to the amplification unit. The main and auxiliary noise reduction algorithms can be different.

In accordance with another aspect of the present

invention, there is provided a method of reducing noise in an input, audio signal containing speech, the method comprising:

- (1) detecting the presence and absence of speech utterances;
- (2) in the absence of speech, determining a noise magnitude spectral estimate;
- (3) in the presence of speech comparing the magnitude spectrum of the audio signal to the noise magnitude spectral estimate;
- (4) calculating an attenuation function from the magnitude spectrum of the audio signal and the noise magnitude spectral estimate; and
- (5) modifying the input signal by the attenuation function, to generate an output signal with reduced noise.

Preferably, the attenuation factor is calculated in accordance with the following equation:

$$H(f) = \left[ \frac{|X(f)|^2 - \beta |\hat{N}(f)|^2}{|X(f)|^2} \right]^\alpha$$

- where  $H(f)$  is the attenuation function,  $|X(f)|$  is the magnitude spectrum of the input audio signal;  $|\hat{N}(f)|$  is the noise magnitude spectral estimate,  $\beta$  is an oversubtraction factor and  $\alpha$  is an attenuation rule, wherein  $\alpha$  and  $\beta$  are selected to give a desired attenuation function. The oversubtraction factor  $\beta$  is, preferably, varied as a function of the signal to noise ratio, with  $\beta$  being zero for high and low signal to noise ratios and with  $\beta$  being increased as the signal to noise ratio increases above zero to a maximum value at a predetermined signal to noise ratio and for higher signal to noise ratios  $\beta$  decreases to zero at a second predetermined signal to noise ratio greater than the first predetermined signal to noise ratio.

- Advantageously, the oversubtraction factor  $\beta$  is divided by a preemphasis function  $P(f)$  to give a modified oversubtraction factor  $\hat{\beta}(f)$ , the preemphasis function being such as to reduce  $\beta$  at high frequencies, to reduce attenuation at high frequencies.

Preferably, the rate of the attenuation factor is controlled to prevent abrupt and rapid changes in the attenuation factor, and it preferably is calculated in accordance with the following equation where  $G_n(f)$  is the smoothed attenuation function at the n'th time frame:

5  $G_n(f) = (1 - \gamma)H(f) + \gamma G_{n-1}(f)$

The oversubtraction factor  $\beta$  can be a function of perceptual distortion.

The method can include remotely turning noise suppression on and off. The method can include automatically disabling  
10 noise reduction in the presence of very light noise or extremely adverse environments.

Another aspect of the present invention provides for a method of determining the presence of speech in an audio signal, the method comprising taking a block of an input audio signal and performing  
15 an auto-correlation on that block to form a correlated signal; and checking the correlated signal for the presence of a periodic signal having a pitch corresponding to that for speech.

In a further aspect the present invention provides an apparatus, for reducing noise in a signal, the apparatus including an input  
20 for a signal and an output for a noise reduced signal, the apparatus comprising: (a) an auxiliary noise reduction means connected to the input for generating an auxiliary signal; and (b) an amplification means connected to the input for receiving the original input signal and to the auxiliary noise reduction means, for receiving the auxiliary signal, the amplification means  
25 being controlled by the auxiliary signal to generate an output signal with reduced noise.

#### **BRIEF DESCRIPTION OF THE DRAWING FIGURES**

For a better understanding of the present invention and to show more clearly how it may be carried into effect, reference will now be  
30 made, by way of example, to the accompanying drawings in which:

Figure 1 is a conceptual blocked diagram for hearing aid noise reduction;

Figure 2 shows a detailed blocked diagram for noise reduction in a hearing aid;

5           Figure 3 shows a modified auto-correlation scheme performed in segments.

### **DESCRIPTION OF THE PREFERRED EMBODIMENT**

Referring first to Figure 1, there is shown schematically a basic strategy employed by the present invention. An input 10 for a noisy signal is split into two paths 12 and 14. In the upper path 12, the noise reduction is effected as indicated in block 16. In the lower path 14, noise reduction is effected in unit 18. The noise reduction unit 18 provides a cleaner signal that is supplied to compression circuitry 20, and the compression circuitry controls amplification unit 22 amplifying the signal in the upper path to generate an output signal at 24.

Here, the position of the noise reduction unit 18 provides a cleaner signal for controlling the compression stage. The noise reduction unit 18 provides a first generating means which generates an auxiliary signal from an auxiliary noise reduction algorithm. The auxiliary algorithm performed by unit 18 may be identical to the one performed by unit 16, except with different parameters. Since the auxiliary noise reduced signal is not heard, unit 18 can reduce noise with increased aggression. This auxiliary signal, in turn, controls the compression circuitry 20, which comprises second generating means for generating a control input for controlling the amplification unit 22.

The noise reduction unit 16 is optional, and can be effected by using a different noise reduction algorithm from that in the noise reduction unit 18. If the same algorithm is used for both noise reduction processes 16 and 18, then the two paths can be merged prior to being split up to go to units 20 and 22. As noted, the noise reduction in the upper path may be altered or eliminated.

With reference to Figure 2, this shows a block diagram of a hearing aid with a specific realization of the proposed noise reduction technique. The incoming signal at 10 is first blocked and windowed, as detailed in applicants' simultaneously filed application serial no. 5 \_\_\_\_\_ which is incorporated herein by reference. The blocked and windowed output provides the input to the frequency transform (all of these steps take place, as indicated, at 32), which preferably here is a Discrete Fourier Transform (DFT), to provide a signal  $X(f)$ . The present invention is not however restricted to a DFT and other transforms can be used. A 10 known, fast way of implementing a DFT with mild restrictions on the transform size is the Fast Fourier Transform (FFT). The input 10 is also connected to a speech detector 34 which works in parallel to isolate the pauses in the incoming speech. For simplicity, reference is made here to "speech", but it will be understood that this encompasses any desired audio 15 signal, including music. These pauses provide opportunities to update the noise spectral estimate. This estimate is updated only during speech pauses as a running slow average. When speech is detected, the noise estimate is frozen.

As indicated at 38, the outputs from both the unit 32 and 20 the voice detection unit 34 are connected to block 38 which detects the magnitude spectrum of the incoming noise,  $|\hat{N}(f)|$ . The magnitude spectrum detected by unit 38 is an estimate. The output of unit 32 is also connected to block 36 for detecting the magnitude spectrum of the incoming noisy signal,  $|X(f)|$ .

25 A noise filter calculation 40 is made based on  $|X(f)|$  and  $|\hat{N}(f)|$ , to calculate an attenuation function  $H(f)$ . As indicated at 42, this is used to control the original input signal  $X(f)$ . This signal is subject to an inverse transform and overlap-add resynthesis in known manner, to give an output at 44.

30 During speech utterances, the magnitude spectrum is compared with the noise spectral estimate. In general, frequency dependent



$$H(f) = \left[ \frac{|X(f)|^2 - \beta |N(f)|^2}{|X(f)|^2} \right]^\alpha$$

where:  $\beta$  is an oversubtraction factor

$\alpha$  is the attenuation rule

$H(f)$  should be between 0.0 and 1.0 to be meaningful. When negative results are obtained,  $H(f)$  is simply set to zero at that frequency. In addition, it is beneficial to increase the minimum value of  $H(f)$  somewhat above zero to avoid complete suppression of the noise. While counter-intuitive, this reduces the musical noise artifact (discussed later) to some extent. The parameter  $\alpha$  governs the attenuation rule for increasing noise levels. Generally, the higher  $\alpha$  is set, the more the noise is punished as  $X(f)$  drops. It was found that the best perceptual results were obtained with  $\alpha = 1.0$ . The special case of  $\alpha = 1.0$  and  $\beta = 1.0$  corresponds to power spectrum subtraction yielding the Wiener filter solution as described above.

The parameter  $\beta$  controls the amount of additional noise suppression required; it is ideally a function of the input noise level. Empirically it was noticed that under very light noise (SNR > 40 dB)  $\beta$  should be zero. For lower SNR signals, the noise reduction becomes less reliable and is gradually turned off. An example of this additional noise reduction is:

$$\begin{aligned} \beta &= 0 & \text{for } \text{SNR} < 0 \\ \beta &= \beta_0 \frac{\text{SNR}}{5} & \text{for } 0 < \text{SNR} < 5 \\ \beta &= \beta_0 \left[ 1 - \frac{(\text{SNR} - 5)}{35} \right] & \text{for } 5 < \text{SNR} < 40 \\ \beta &= 0 & \text{for } \text{SNR} > 40 \end{aligned}$$

In this example,  $\beta_0$  refers to the maximum attenuation, 5.0. In effect, from

attenuation is calculated as a function of the two input spectra. Frequency regions where the incoming signal is higher than the noise are attenuated less than regions where the incoming signal is comparable or less than the noise. The attenuation function is generally given by

$$H(f) = \left[ \frac{|S(f)|^2}{|S(f)|^2 + |N(f)|^2} \right]^\alpha$$

- 5    where     $H(f)$  is the attenuation as a function of frequency  
               $S(f)$  is the clean speech spectrum  
               $N(f)$  is the noise spectrum  
               $\alpha$  is the attenuation rule

The attenuation rule preferably selected is the Wiener attenuation rule  
10    which corresponds to  $\alpha$  equal to 1. The Wiener rule minimizes the noise power relative to the speech. Other attenuation rules can also be used, for example the spectral subtraction rule having  $\alpha$  equal to 0.5.

Since neither  $S(f)$  nor  $N(f)$  are precisely known and would require a priori knowledge of the clean speech and noise spectra, they are  
15    replaced by estimates  $\hat{S}(f)$  and  $\hat{N}(f)$ :

$$|\hat{S}(f)|^2 \approx |X(f)|^2 - |\hat{N}(f)|^2$$

where  $X(f)$  is the incoming speech spectrum and  $\hat{N}(f)$  is the noise spectrum as estimated during speech pauses. Given perfect estimates of the speech and noise spectra, application of this formula yields the optimum (largest)  
20    signal-to-noise-ratio (SNR). Although the SNR would be maximized using this formula, the noise in the resulting speech is still judged as excessive by subjective assessment. An improved implementation of the formula taking into account these perceptual aspects is given by:

SNR = 0, the attenuation  $\beta$  is ramped up uniformly to a maximum,  $\beta_0$ , at SNR = 5, and this is then uniformly ramped down to zero at SNR = 40.

Another aspect of the present invention provides improvements in perceptual quality making  $\beta$  a function of frequency. As an instance of the use of this feature, it was found that to avoid excessive attenuation of high frequency information, it was necessary to apply a preemphasis function,  $P(f)$ , to the input spectrum  $X(f)$ , where  $P(f)$  is an increasing function of frequency. The effect of this preemphasis function is to artificially raise the input spectrum above the noise floor at high frequencies. The attenuation rule will then leave the higher frequencies relatively intact. This preemphasis is conveniently accomplished by reducing  $\beta$  at high frequencies by the preemphasis factor.

$$\hat{\beta}(f) = \frac{\beta}{P(f)}, \quad \text{where } \hat{\beta} \text{ is } \beta \text{ after preemphasis.}$$

Without further modification, the above formula can yield noise reduced speech with an audible artifact known as musical noise. This occurs, because in order for the noise reduction to be effective in reducing noise, the frequency attenuation function has to be adaptive. The very act of adapting this filter allows isolated frequency regions of low SNR to flicker in and out of audibility leading to this musical noise artifact. Various methods are used to reduce this problem. Slowing down the adaptation rate significantly reduces this problem. In this method, a forgetting factor,  $\gamma$  is introduced to slow abrupt gain changes in the attenuation function:

$$G_n(f) = (1 - \gamma)I(f) + \gamma G_{n-1}(f)$$

where  $G_n(f)$  and  $G_{n-1}(f)$  are the smoothed attenuation functions at the  $n$ 'th and  $(n-1)$ 'th time frames.

Further improvements in perceptual quality are possible by making  $\beta$  (in addition to being a function of frequency) a function of perceptual distortion. In this method, the smoothing function (instead of a

simple exponential or forgetting factor as above) bases its decision on adapting  $G_n(f)$  on whether such a change is masked perceptually. The perceptual adaptation algorithm uses the ideal attenuation function  $II(f)$  as a target because it represents the best SNR attainable. The algorithm decides  
5 how much  $G_n(f)$  can be adjusted while minimizing the perceptual distortion. The decision is based on a number of masking criteria in the output spectrum including:

1. Spread of masking - changes in higher frequency energy are masked by the presence of energy in frequencies in the vicinity -  
10 especially lower frequencies;
2. Previous energy - changes in louder frequency components are more audible than changes in weaker frequency components;
3. Threshold of hearing - there is no point in reducing the  
15 noise significantly below the threshold of hearing at a particular frequency;
4. Previous attenuation - low levels should not be allowed to jump up rapidly - high levels should not suddenly drop rapidly unless masked by 1), 2) or 3).

For applications where the noise reduction is used to  
20 preprocess the input signal before reaching the compression circuitry (schematically shown in Figure 1), the perceptual characteristics of the noise reduced signal are less important. In fact, it may prove advantageous to perform the noise reduction with two different suppression algorithms as mentioned above. The noise reduction 16 would be optimized for  
25 perceptual quality while the other noise reduction 18 would be optimized for good compression performance.

A key element to the success of the present noise suppression or reduction system is the speech or voicing detector. It is crucial to obtain accurate estimates of the noise spectrum. If the noise  
30 spectral estimate is updated during periods of speech activity, the noise spectrum will be contaminated with speech resulting in speech cancellation. Speech detection is very difficult, especially under heavy noise situations.

Although, a three-way distinction between voiced speech, unvoiced speech (consonants) and noise is possible under light noise conditions, it was found that the only reliable distinction available in heavy noise was between voiced speech and noise. Given the slow averaging of the noise spectrum, the addition of low-energy consonants is insignificant.

Thus, another aspect of the present invention uses an auto-correlation function to detect speech, as the advantage of this function is the relative ease with which a periodic signal is detected. As will be appreciated by those skilled in the art, an inherent property of the auto-correlation function of a periodic signal is that it shows a peak at the time lag corresponding to the repetition period (see Rabiner, L.R., and Schafer, R.W., *Digital Processing of Speech Signals*, (Prentice Hall Inc., 1978) which is incorporated herein by reference). Since voiced speech is nearly periodic in time at the rate of its pitch period, a voicing detector based on the auto-correlation function was developed. Given a sufficiently long auto-correlation, the uncorrelated noise tends to cancel out as successive pitch periods are averaged together.

A strict short-time auto-correlation requires that the signal first be blocked to limit the time extent (samples outside the block are set to zero). This operation is followed by an auto-correlation on the block. The disadvantage of this approach is that the auto-correlation function includes fewer samples as the time lag increases. Since the pitch lag (typically between 40 and 240 samples (equivalent to 2.5 to 15 milliseconds) is a significant portion of the auto-correlation frame (typically 512 samples or 32 milliseconds), a modified version of the auto-correlation function avoiding this problem was calculated. This modified version of the auto-correlation function is described in Rabiner, L.R., and Schafer, R.W., *Digital Processing of Speech Signals*, *supra*. In this method, the signal is blocked and correlated with a delayed block (of the same length) of the signal. Since the samples in the delayed block include samples not present in the first block, this function is not a strict auto-correlation but shows periodicities better.

It is realized that a hearing aid is a real-time system and

that all computational elements for each speech block are to be completed before the next arrives. The calculation time of a long auto-correlation, which is required only every few speech blocks, would certainly bring the system to a halt every time it must be calculated. It is therefore recognized  
5 that the auto-correlation should be segmented into a number of shorter sections which can be calculated for each block and stored in a partial correlation table. The complete auto-correlation is determined by stacking these partial correlations on top of each other and adding as shown in Figure 3.

10 Referring to Figure 3, input sample 50 is divided into separate blocks stored in memory buffers as indicated at 52. The correlation buffers 52 are connected to a block correlation unit 54, where the auto-correlation is performed. Partial cross-correlations 56 are summed to give the final correlation 58.

15 This technique quickly yields the exact modified auto-correlation and is the preferred embodiment when sufficient memory is available to store the partial correlations.

When memory space considerations rule out the above technique, a form of exponential averaging may be used to reduce the  
20 number of correlation buffers to a single buffer. In this technique, successive partial correlations are summed to the scaled down previous contents of the correlation buffer. This simplification significantly reduces the memory but implicitly applies an exponential window to the input sequence. The windowing action, unfortunately, reduces time periodicities.  
25 The effect is to spread the autocorrelation peak to a number of adjacent time lags in either direction. This peak smearing reduces the accuracy of the voicing detection somewhat.

In the implementations using an FFT transform block, these partial correlations (for either technique given above) can be  
30 performed quickly in the frequency domain. For each block, the correlation operation is reduced to a sequence of complex multiplications on the transformed time sequences. The resulting frequency domain sequences

can be added directly together and transformed back to the time domain to provide the complete long auto-correlation. In an alternate embodiment, the frequency domain correlation results are never inverted back to the time domain. In this realization, the pitch frequency is determined directly  
5 in the frequency domain.

Since the auto-correlation frame is long compared to the (shorter) speech frame, the voicing detection is delayed compared to the current frame. This compensation for this delay is accomplished in the noise spectrum update block.

10 An inter-frame constraint was placed on frames considered as potential candidates for speech pauses to further reduce false detection of noise frames. The spectral distance between the proposed frame and the previous estimates of the noise spectrum are compared. Large values reduce the likelihood that the frame is truly a pause. The  
15 voicing detector takes this information, the presence or absence of an auto-correlation peak, the frame energy, and a running average of the noise as inputs.

**I CLAIM:**

1. A method of reducing noise in a signal, the method comprising the steps:
  - (1) supplying the input signal to an amplification unit;
  - 5 (2) subjecting the input signal to an auxiliary noise reduction algorithm, to generate an auxiliary signal;
  - (3) using the auxiliary signal to determine a control input for the amplification unit; and
  - (4) controlling the amplification unit with the control signal, to  
10 generate an output signal with reduced noise.
2. A method as claimed in claim 1, wherein the input signal is subjected to a main noise reduction algorithm, to generate a modified input signal, which is supplied to the amplification unit.
3. A method as claimed in claim 2, wherein the main and auxiliary  
15 noise reduction algorithms are different.
4. A method of reducing noise in an input, audio signal containing speech, the method comprising the steps of:
  - (1) detecting the presence and absence of speech utterances;
  - (2) in the absence of speech, determining a noise magnitude spectral  
20 estimate;
  - (3) in the presence of speech comparing the magnitude spectrum of the audio signal to the noise magnitude spectral estimate;
  - (4) calculating an attenuation function from the magnitude spectrum of the audio signal and the noise magnitude spectral  
25 estimate; and
  - (5) modifying the input signal by the attenuation function, to generate an output signal with reduced noise.



5. A method as claimed in claim 4, wherein the square of the speech magnitude spectral estimate is determined by subtracting the square of the of the noise magnitude spectral estimate from the square of the magnitude spectrum of the input signal.

5 6. A method as claimed in claim 5, wherein the attenuation function is calculated in accordance with the following equation:

$$H(f) = \left[ \frac{|X(f)|^2 - \beta |\hat{N}(f)|^2}{|X(f)|^2} \right]^\alpha$$

where  $H(f)$  is the attenuation function,  $|X(f)|$  is the magnitude spectrum of the input audio signal;  $|\hat{N}(f)|$  is the noise magnitude spectral estimate,  $\beta$  is  
10 an oversubtraction factor and  $\alpha$  is an attenuation rule, wherein  $\alpha$  and  $\beta$  are selected to give a desired attenuation function.

7. A method as claimed in claim 6, wherein the oversubtraction factor  $\beta$  is varied as a function of the signal to noise ratio, with  $\beta$  being zero for high and low signal to noise ratios and with  $\beta$  being increased as the signal  
15 to noise ratio increases above zero to a maximum value at a predetermined signal to noise ratio and for higher signal to noise ratios  $\beta$  decreases to zero at a second predetermined signal to noise ratio greater than the first predetermined signal to noise ratio.

8. A method as claimed in claim 7, wherein the oversubtraction factor  
20  $\beta$  is divided by a preemphasis function  $P(f)$  to give a modified oversubtraction factor  $\hat{\beta}(f)$ , the preemphasis function being such as to reduce  $\beta$  at high frequencies, and thereby reduce attenuation at high frequencies.

9. A method as claimed in claim 6, 7 or 8 wherein the rate of change of

the attenuation function is controlled to prevent abrupt and rapid changes in the attenuation function.

10. A method as claimed in claim 6, wherein the attenuation function is calculated at successive time frames, and the attenuation function is  
5 calculated in accordance with the following equation:

$$G_n(f) = (1 - \gamma)H(f) + \gamma G_{n-1}(f)$$

wherein  $G_n(f)$  and  $G_{n-1}(f)$  are the smoothed attenuation functions at the  $n$ 'th and  $(n-1)$  'th time frames, and  $\gamma$  is a forgetting factor.

11. A method as claimed in claim 10, wherein  $\beta$  is a function of  
10 perceptual distortion.

12. A method as claimed in claim 4 which includes remotely turning noise suppression on and off.

13. A method as claimed in claim 4 which includes automatically disabling noise reduction in the presence of very light noise or extremely  
15 adverse environments.

14. A method as claimed in claim 4 which includes detecting speech with a modified auto-correlation function.

15. A method as claimed in claim 14, wherein the auto-correlation function comprises:  
20 (1) taking an input sample and separating it into short blocks and storing the blocks in correlation buffers;  
(2) correlating the blocks with one another, to form partial correlations; and  
(3) summing the partial correlations to obtain a final correlation.

16. A method as claimed in claim 15, wherein the method is carried out by digital signal processing and wherein the method includes using a Fast Fourier Transform to generate the partial correlations and includes detection of voiced speech directly in the frequency domain.
- 5 17. A method of determining the presence of speech in an audio signal, the method comprising taking a block of an input audio signal and performing an auto-correlation on that block to form a correlated signal; and checking the correlated signal for the presence of a periodic signal having a pitch corresponding to that for speech.
- 10 18. A method as claimed in claim 17, wherein the auto-correlation is performed on a first block taken from an audio signal, and a delayed block from the audio signal.
19. A method as claimed in claim 18, wherein each block is subdivided into a plurality of shorter sections and the correlation comprises a  
15 correlation between pairs of the shorter sections to form partial correlations, and subsequently summing the partial correlations to obtain the correlated signal.
20. A method as claimed in claim 19, wherein an input signal is stored as a plurality of samples in a pair of correlation buffers, and the auto-  
20 correlation is performed on the signals in the buffers to determine the partial correlations, which partial correlations are summed and stored.
21. An apparatus, for reducing noise in a signal, the apparatus including an input for a signal and an output for a noise reduced signal, the apparatus comprising:
- 25 (a) an auxiliary noise reduction means connected to the input for generating an auxiliary signal; and

(b) an amplification means connected to the input for receiving the original input signal and to the auxiliary noise reduction means, for receiving the auxiliary signal, the amplification means being controlled by the auxiliary signal to generate an output signal with reduced noise.

22. An apparatus as claimed in claim 21, wherein the auxiliary noise reduction means comprises:

(1) detection means connected to said input and providing a detection signal indicative of the presence of a desired audio signal;

(2) magnitude means for determining the magnitude spectrum of the input signal, with both the detection means and the magnitude means being connected to the input;

(3) spectral estimate means for generating a noise magnitude spectral estimate and being connected to the detection means and to the input of the apparatus; and

(4) noise filter calculation means connected to the spectral estimate means and the magnitude means, for receiving the noise magnitude spectral estimate and magnitude spectrum of the input signal to produce the auxiliary signal and having an output for the auxiliary signal connected to the amplification means.

23. An apparatus as claimed in claim 22, which includes a frequency transform means connected between said input and both of the magnitude means and the spectral estimate means for transforming the signal into the frequency domain to provide a transformed signal wherein the magnitude means determines the magnitude spectrum from the transformed signal, and wherein the spectral estimate means determines the noise spectral estimate from the transformed signal.

24. An apparatus as claimed in claim 23, wherein the noise filter calculation means determines the square of the speech magnitude spectral


estimate by subtracting the square of the noise magnitude spectral estimate from the square of the magnitude spectrum of the input signal and wherein the noise filter calculation means calculates the auxiliary signal as an attenuation function in accordance with the following equation:

$$5 \quad H(f) = \left[ \frac{|X(f)|^2 - \beta |\hat{N}(f)|^2}{|X(f)|^2} \right]^\alpha$$

where  $H(f)$  is the attenuation function,  $|X(f)|$  is the magnitude spectrum of the input audio signal;  $|\hat{N}(f)|$  is the noise magnitude spectral estimate,  $\beta$  is an oversubtraction factor and  $\alpha$  is an attenuation rule, wherein  $\alpha$  and  $\beta$  are selected to give a desired attenuation function.

## ABSTRACT OF THE DISCLOSURE

This invention describes a practical application of noise reduction in hearing aids. Although listening in noisy conditions is difficult for persons with normal hearing, hearing impaired individuals are at a considerable  
5 further disadvantage. Under light noise conditions, conventional hearing aids amplify the input signal sufficiently to overcome the hearing loss. For a typical sloping hearing loss where there is a loss in high frequency hearing sensitivity, the amount of boost (or gain) rises with frequency. Most frequently, the loss in sensitivity is only for low-level signals; high level  
10 signals are affective minimally or not at all. A compression hearing aid is able to compensate by automatically lowering the gain as the input signal level rises. This compression action is usually compromised under noisy conditions. In general, hearing aids are of lesser benefit under noisy conditions since both noise and speech are boosted together when what is  
15 really required is a reduction of the noise relative to the speech. A noise reduction algorithm with the dual purpose of enhancing speech relative to noise and also providing a relatively clean signal for the compression circuitry is described.

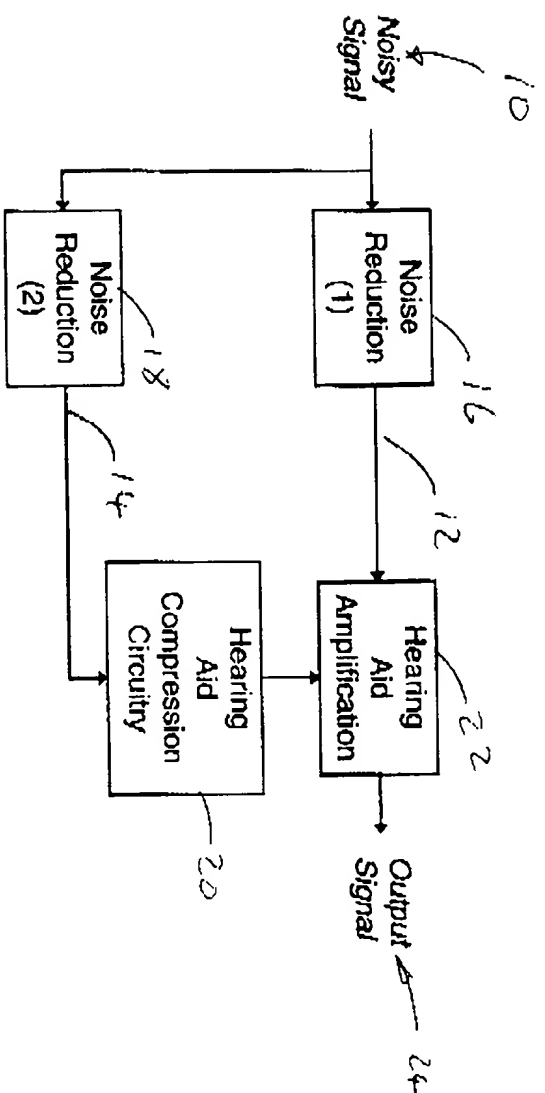

**Figure 1: Hearing Aid Conceptual Noise Reduction Diagram**

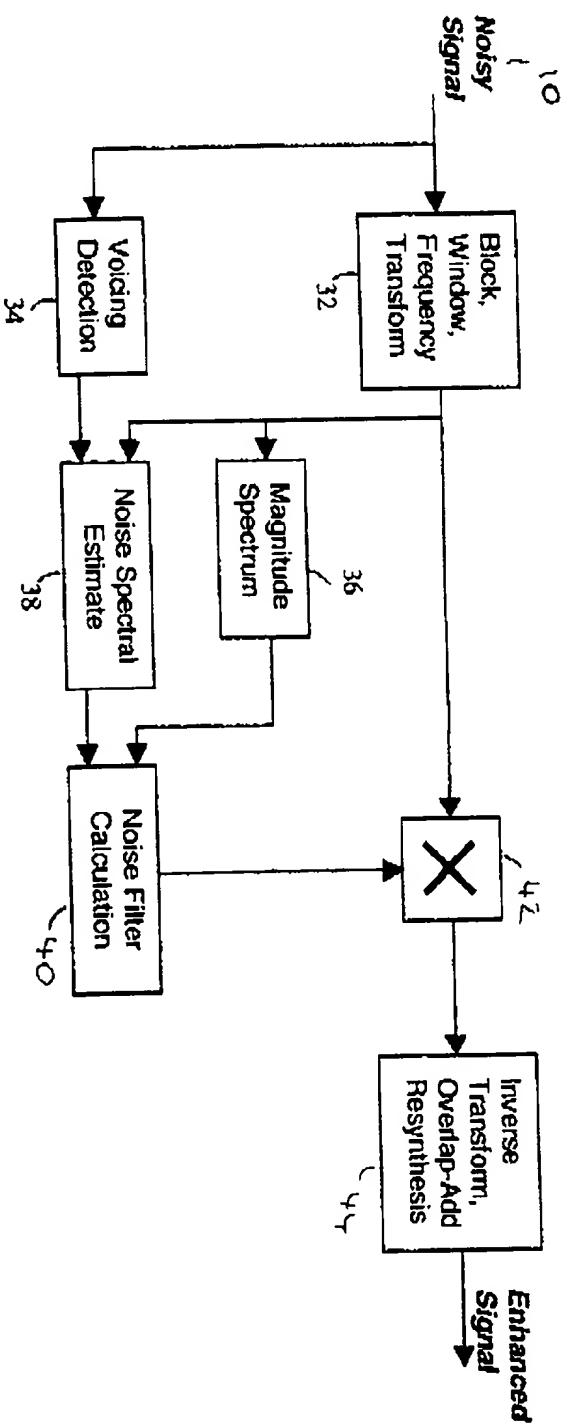


Figure 2



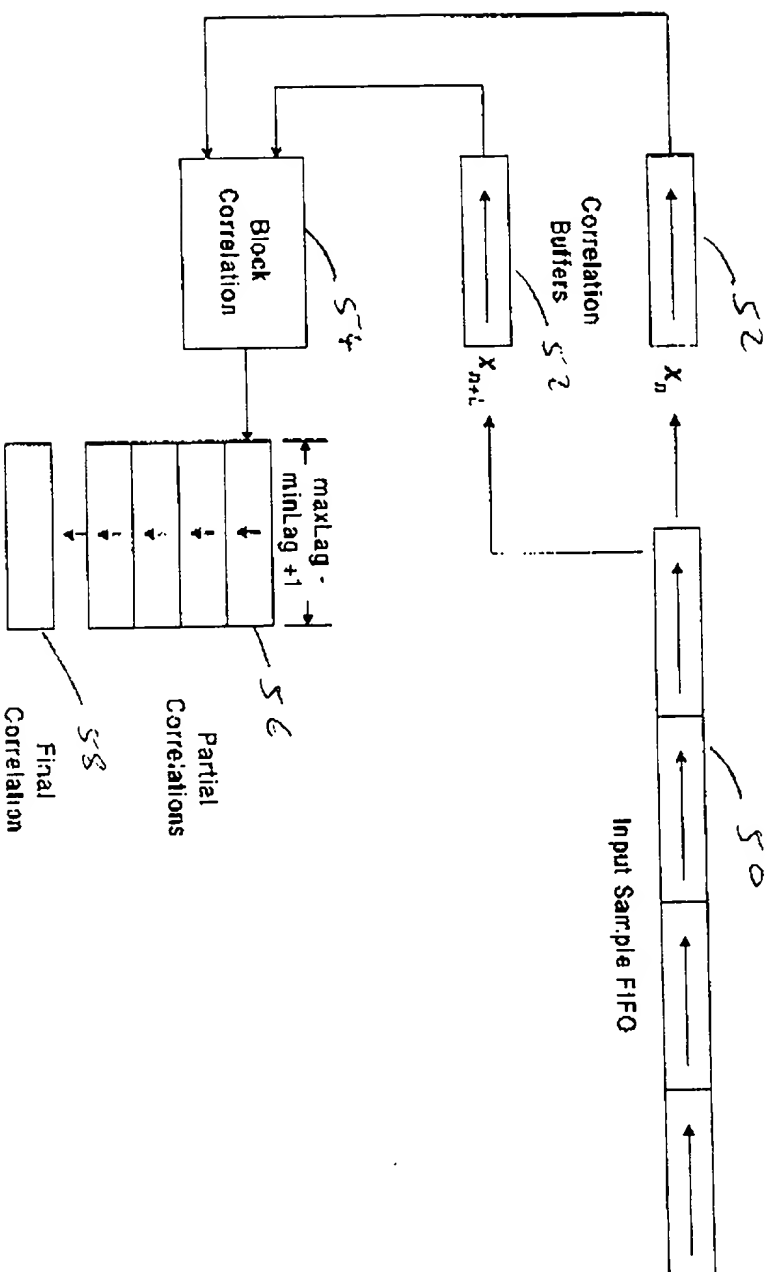


Figure 3: Modified autocorrelation performed in segments

## DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:  
**METHOD AND APPARATUS FOR NOISE REDUCTION, PARTICULARLY IN HEARING AIDS**  
the specification of which (check one)

☒ is attached hereto \_\_\_\_\_ was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_  
and was amended on \_\_\_\_\_

I hereby state that I have reviewed and understand the contents of the above identified specifications, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

### Prior Foreign Application(s)

### Priority Claimed

(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
_____ Additional applications identified on attached sheet.				

I hereby claim the benefit under Title 35, United States Code, §120 of any United States Application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

Application Serial No.	Filing Date	Status - Patented, pending, abandoned
60/041,991	April 16, 1997	Pending
_____	_____	_____
_____ Additional applications identified on attached sheet.		

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office in connection therewith:

Daniel R. Bereskin	22,257	Timothy J. Sinnott	31,083	Robin L.A. Coster	38,016
Richard J. Parr	22,836	H. Samuel Frost	31,696	Michael E. Charles	38,036
David W.R. Langton	27,717	Philip Mendes da Costa	33,106	Micheline Gravelle	40,261
H. Roger Hart	26,426	Robert B. Storey	33,108	Robert H.C. MacFarlane	40,366
C. Lloyd Sarginson	29,245	All of Bereskin & Parr	22,533	Andrew I. McIntosh	40,453

Address all telephone calls to H. Samuel Frost at Telephone No. (416) 364-7311. Address all correspondence to Bereskin & Parr, Box 401, 40 King Street West, Toronto, Ontario, Canada M5H 3Y2

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such wilful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR ROBERT BRENNAN	INVENTOR'S SIGNATURE	DATE
RESIDENCE 19 MCKENZIE AVENUE, KITCHENER, ONTARIO, CANADA, N2H 2A7	CITIZENSHIP CANADIAN	
POST OFFICE ADDRESS SAME AS ABOVE		

See attached sheet for similar information and signature for additional joint inventors.